

MY-HITE COLLECTION

ESSENTIALS PROGRAM



FRÍANT

ALL
WORKSTYLES
WELCOME

TABLE OF CONTENTS

INTRODUCTION

Terms and Conditions	4
Standard Finishes	6

3 STAGE SPECIFIC

Base Application - Electrical Draw	7
Trough Cover Dimension	8
Technical Specification	9

2 STAGE SPECIFIC

Base Application - Electrical Draw	10
Technical Specification	11

BEAM

Worksurface Planning Guide	12
How to order Beam	13
Beam Creep	15
Beam Elevation Height	16
Data Port Plate	17

SPECIFY 3 STAGE BASE

Straight T-Leg	18
----------------	----

SPECIFY 2 STAGE BASE

Straight T-Leg	19
----------------	----

WORKSURFACES FOR FREESTANDING APPLICATION

Rectangular	20
-------------	----

SPECIFY BEAM

Beam Package with power & data cutout	21
Supporting Post - Inline & End of Run	22
Supporting Post - 2, 3, 4 Way	23
Base Cover, non-powered	24
Beam Mounted Screens	25

ELECTRICAL DISTRIBUTION

Base Power and Ceiling Power Entry	26
Ceiling Power Entry	26
Receptacles and Data Port Plate	27
Single Circuit Infeed	28
Table Power Distribution	28
Daisy Chain Power Connector	28
Desk Mounted Power Unit	28

ACCESSORIES

Wire Manager	29
Mesh Wire Manager	29
Casters	29
Monitor Arms	29

SHIELD FREESTANDING LAMINATE PANELS

Freestanding Laminate Panels with Feet	30
Freestanding Laminate Panels with Casters	31

Terms and Conditions

ESSENTIALS PROGRAM

Orders with the Essentials program are limited to under \$10,000 net. Essentials orders must be on separate P.O.s and cannot be combined with standard lead time orders.

PRICES

Pricing is delivered, freight included to 48 contiguous states. Specific requirements apply, minimum order required, see freight policy for details. See complete freight rules and policy on www.friant.com.

ORDERING

Purchase Orders should be sent to orders@friant.com or faxed to (510) 535-6895. If your specifications were created with CAP, GIZA or Project Matrix, please send the worksheet (.SP4, or .SIF) with your Purchase Order.

MAXIMUM ORDER

All of our Essentials programs will be offered with a maximum order size of \$10,000 net and are based on capacity. We encourage our customers to check stock on orders over \$10,000 as we may be able to accommodate larger opportunities.

TERMS

Net 30 days from date of invoice. Invoices are delinquent if not paid 30 days from date of invoice. In the event timely payment is not made, interest will be charged at the rate of 1.5% per month on delinquent accounts. Buyers will also be liable for normal collection costs and attorney's fee. 50% deposit is required with every order, unless prior arrangements have been made.

ORDERS

Orders are only accepted by issuance of our formal acknowledgment, and are subject to the terms set forth herein and on our order acknowledgment. It is the responsibility of the buyer to review our acknowledgment for accuracy.

LEAD TIME

Lead times are subject to availability, see www.Friant.com for details.

SHIPPING

Friant generally palletizes, boxes and/or shrink-wraps its products. If buyer requests additional packaging or special shipping, then it is responsible for any extra costs that result. Buyer obtains title to products and assumes the risk of loss for them upon shipment from Friant's plant.

CLAIMS

We are not responsible for damage suffered in transit. Merchandise should be inspected for possible freight damage upon delivery. The consignee should file for damage or shortages with the carrier within 5 days of delivery. You are also protected for "concealed damage" if you file claim with the carrier within 5 days of delivery. Buyer must make all claims against Friant for defects, errors or shortages in writing within 10 days after delivery. Failure to make such a claim shall constitute full acceptance.

RETURNS

No merchandise may be returned without our written consent and shipping instructions. Unauthorized returns will not be accepted and will be returned freight collect.

PARTIAL SHIPMENTS

We will make every attempt to ship orders complete and on schedule. However, we reserve the right to make partial shipments, as merchandise is ready. Invoices covering these shipments are to be paid as they become due.

ORDER CHANGE/CANCELLATIONS

Our order confirmation is final and binding. Any order change or cancellation is subject to our ability to conform. For the most up to date information, always review the order change/cancellation policy online. Allowable changes within the posted policy must be made in writing.

SHIPMENT AND PREPAID FREIGHT

Unless otherwise instructed, we reserve the option to ship by what is, in our opinion, the best possible way. Upon request, we will prepay and add freight for accounts with established credit.

DELIVERY

We are not liable for delay or failure of delivery due to strikes and/or differences with workmen, war, riot, fire, compliance with government regulations, acts of nature, failure or delays of sources of supply, or any other causes beyond our control.

Terms and Conditions

STORAGE

If buyer cannot accept delivery when merchandise is ready, we reserve the right to transfer goods to storage. Costs of transfer and storage will be charged to the buyer's account, and we will deem such transfer as constituting shipment for all purposes, including invoicing, as of the date the transfer is made.

CONSTRUCTION — SPECIFICATIONS

All items are produced to price list specifications unless otherwise advised. All dimensions shown are approximate. Manufacturer reserves the right to make modifications and/or improvements without prior notice.

RIGHTS AND WARRANTIES — 5 YEARS

This warranty is given to the initial purchaser and is valid from the date of purchase, for as long as the initial purchaser owns the product. This warranty covers defects in material and craftsmanship found during normal usage of the product during the warranty period. Normal usage is defined by 8 hour shifts in the product's intended application and in an indoor environment that conforms to the ANSI/ASHRAE Standard 55: Thermal Environmental Conditions for Human Occupancy (relating to air temperature, mean radiant temperature, air velocity, clothing insulation, metabolic rate, and humidity). Friant's warranty does not cover usage other than normal usage as defined in the previous sentence. If the product is defective, and if written notice of the defect is given to Friant & Associates within the applicable warranty period, Friant & Associates, at its option, will either repair or replace the defective product with a comparable component or product. This warranty applies to all products except as noted below.

The following exceptions to the limited 5 year warranty apply: All Motors and electrical components are warranted for 5 years.

High wear parts, such as wood veneer, fabrics, laminates and other covering material/finishes, foam, glides, etc. are warranted for one (1) year. This warranty does not apply to damage caused by a carrier, alteration to the product not expressly authorized by Friant & Associates, nor to product considered to be of a consumable nature such as bulbs, light ballasts, etc. It also does not apply to "Customer's Own Material" (i.e. material specified by the customer that is not a standard Friant & Associates offering) used in the manufacture of Friant & Associates products.

Our warranty for LED lights is 2 years.

Friant & Associates does not warrant the matching of colors, grain or texture, except to within commercially acceptable standards. This includes normal variations between dye lots (fabrics).

A product will not be considered defective, and Friant & Associates will not be obligated to replace it, if it is not installed in a proper manner (i.e. product not leveled, not secured properly, etc.) or if it is not used in a manner and/or in an environment that constitutes normal usage, as defined above.

Except as noted above, Friant & Associates makes no express or implied warranties to any product, and in particular makes no warranty of fitness for any particular use. At Friant & Associates' option, product repair and replacement is the customer's exclusive remedy for any and all product defects.

Friant & Associates shall not be liable for consequential, economic, or incidental damages arising from any product defect.

CALIFORNIA PROP 65 WARNING

Products in this catalog can expose you to chemicals including wood dust, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to <https://www.p65warnings.ca.gov/products/furniture-products>.

CARB

Friant products are CARB 93120 compliant for formaldehyde (phase 2)

TSCA Title VI

Friant products are TSCA Title VI Compliant

MAS

Accredited Compliance Designation - ANSI/BIFMA x7.1 & e3-2014 7.6.1, 7.6.2, 7.6.3
California Dept. Of Public Health Standard Method v1.2

Conforms With: LEED v4

Criteria of MAS Certified Green ® Program

Standard Finishes


For matching edge PVC, please read across matrix.

WORKSURFACE FINISHES		EDGE FINISHES (3MM PVC)		PAINT TRIM
M1	Light Maple	E1	Light Maple	
M2	Light Cherry	E2	Light Cherry	
M3	Medium Cherry	E3	Medium Cherry	
M4	Dark Mahogany	E4	Dark Mahogany	
M6	Light Gray	E6	Light Gray	
M9	Cloud White	E9	Cloud White	
M10	Espresso	E10	Espresso	
M11	Light Walnut	E14	Light Walnut	
M12	Medium Walnut	E15	Medium Walnut	
M13	Licorice	E13	Licorice	CW Cloud White
M14	Carob	E17	Carob	SV Silver
M16	Tundra	E19	Tundra	
M23	Bark	E26	Bark	
M25	Winter	E28	Winter	
M27	Medium Ash	E30	Medium Ash	
M28	Arctic	E31	Arctic	
		E11	Medium Tone	
		E12	Dark Tone	

INTRODUCTION

Base Application — 3 stage

Worksurface depth

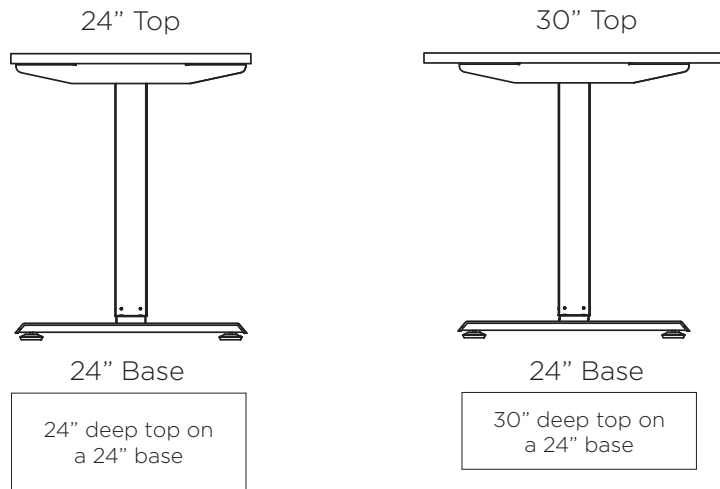


Electrical Draw of My-Hite — 3 stage

TABLE	MOTION	WATTS	AMPS
ONE (1) ADJUSTABLE TABLE	START UP DRAW	-	< 5 AMP
ONE (1) LOADED ADJUSTABLE TABLE	RUNNING DRAW	100W	4.16 AMP
ONE (1) EMPTY ADJUSTABLE TABLE	RUNNING DRAW	50W	2.08 AMP
ONE (1) ADJUSTABLE TABLE (NOT IN MOTION)	DRAW	-	0 AMP

Trough Cover Dimensions — 3 stage

Fixed trough cover is 2.5" tall and 8" deep

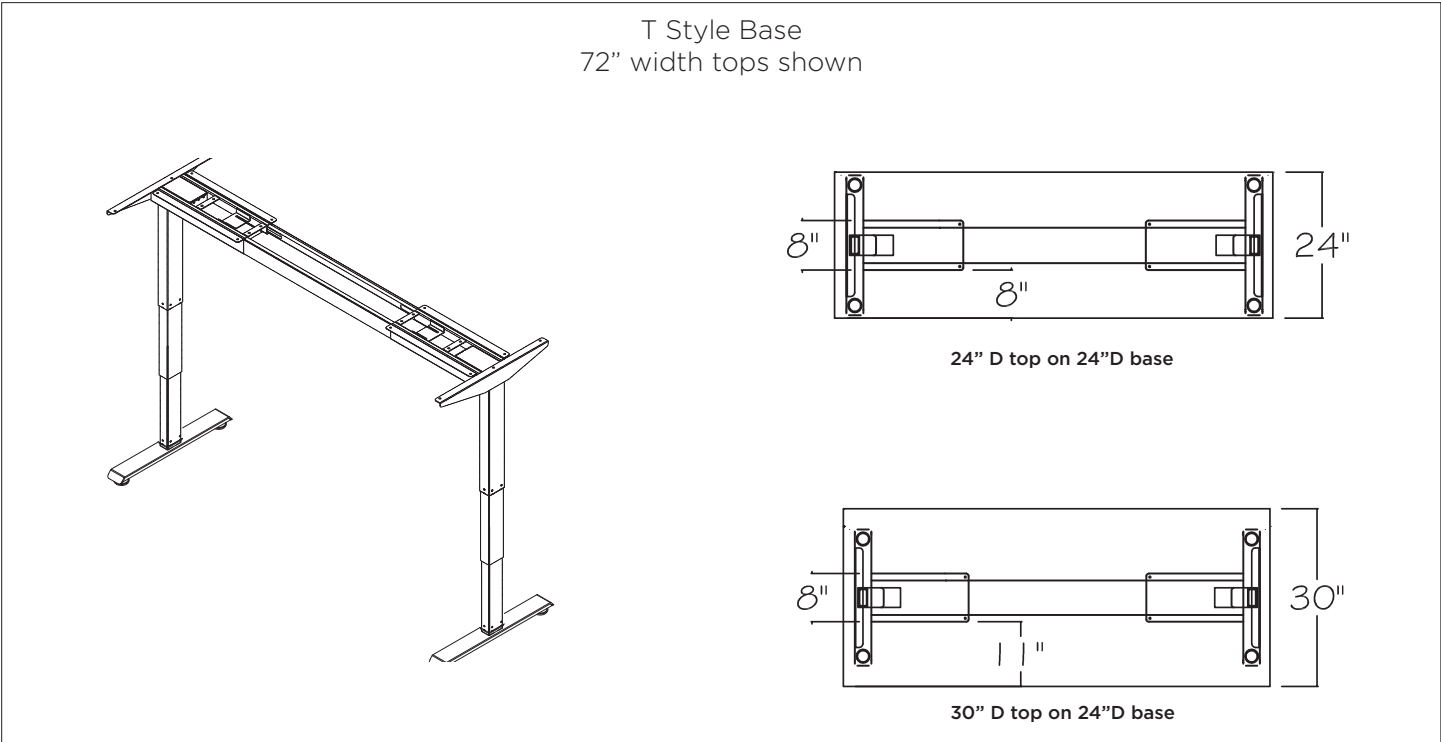

INTRODUCTION

Technical Specifications for Bases — 3 stage


Straight Legs

See page 18

Display	Digital display with three programmable presets
Foot Length in inches	22" and 28" available for 24" and 30", 36" worksurfaces
Legs	3 stage
Leg Diameter	2.75" x 2.75"
Height range (excluding top)	24.5"- 50"
Frame width expansion	Width extendable 38"- 68" in 1 mm increments
Worksurface widths	46" - 70", See page 20
Worksurface depths	24", 30" See page 20
Max lifting capacity	220 lbs
Power Cord Length	9'
Base weight without top	62 lbs
Gauge of Steel	Inner/Middle tubes: 2mm / Outer tube 2mm = 12 gauge
Speed	40 mm/s
Table Not In Motion, Electrical Draw	0 W
Loaded Running Table, Electrical Draw	200/360 W
UL	UL962

Base Application — 2 stage

Worksurface depth

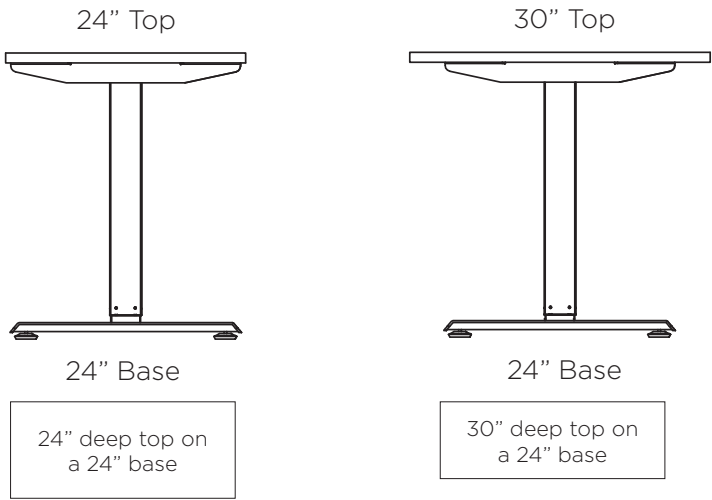

Electrical Draw of My-Hite — 2 stage

TABLE	MOTION	WATTS	AMPS
ONE (1) ADJUSTABLE TABLE	START UP DRAW	400W	< 5 AMP
ONE (1) LOADED ADJUSTABLE TABLE	RUNNING DRAW	400W	3 AMP
ONE (1) EMPTY ADJUSTABLE TABLE	RUNNING DRAW	200W	1.5 AMP
ONE (1) ADJUSTABLE TABLE (NOT IN MOTION)	DRAW	.3W	0 AMP

Technical Specifications — 2 stage


Straight Legs

See page 19

Display	Digital display with four programmable presets
Foot Options	24" ONLY
Legs	T LEG
Leg Diameter	2.72" x 2.72"
Height range(excluding top)	27"- 45.5"
Frame width expansion	Width extendable 41"- 74" in 1mm increments
Worksurface widths	42"- 84"
Worksurface depths	24" - 30"
Max lifting capacity	260 lbs
Base weight without top	66 lbs
Gauge of Steel	Inner/Middle tubes:1.5mm/Outer tube 1.5mm
Speed	36mm/s
Table Not in Motion,Electrical Draw	.3 W
Loaded Running Table,Electrical Draw	400W
Decibel Rating	50 db
Power Cord	10' cord - 3 PRONG PLUG
Finishes	BU, CW, SV
UL	UL962
Warranty	5 YEARS

Worksurface Planning Guide

INTRODUCTION

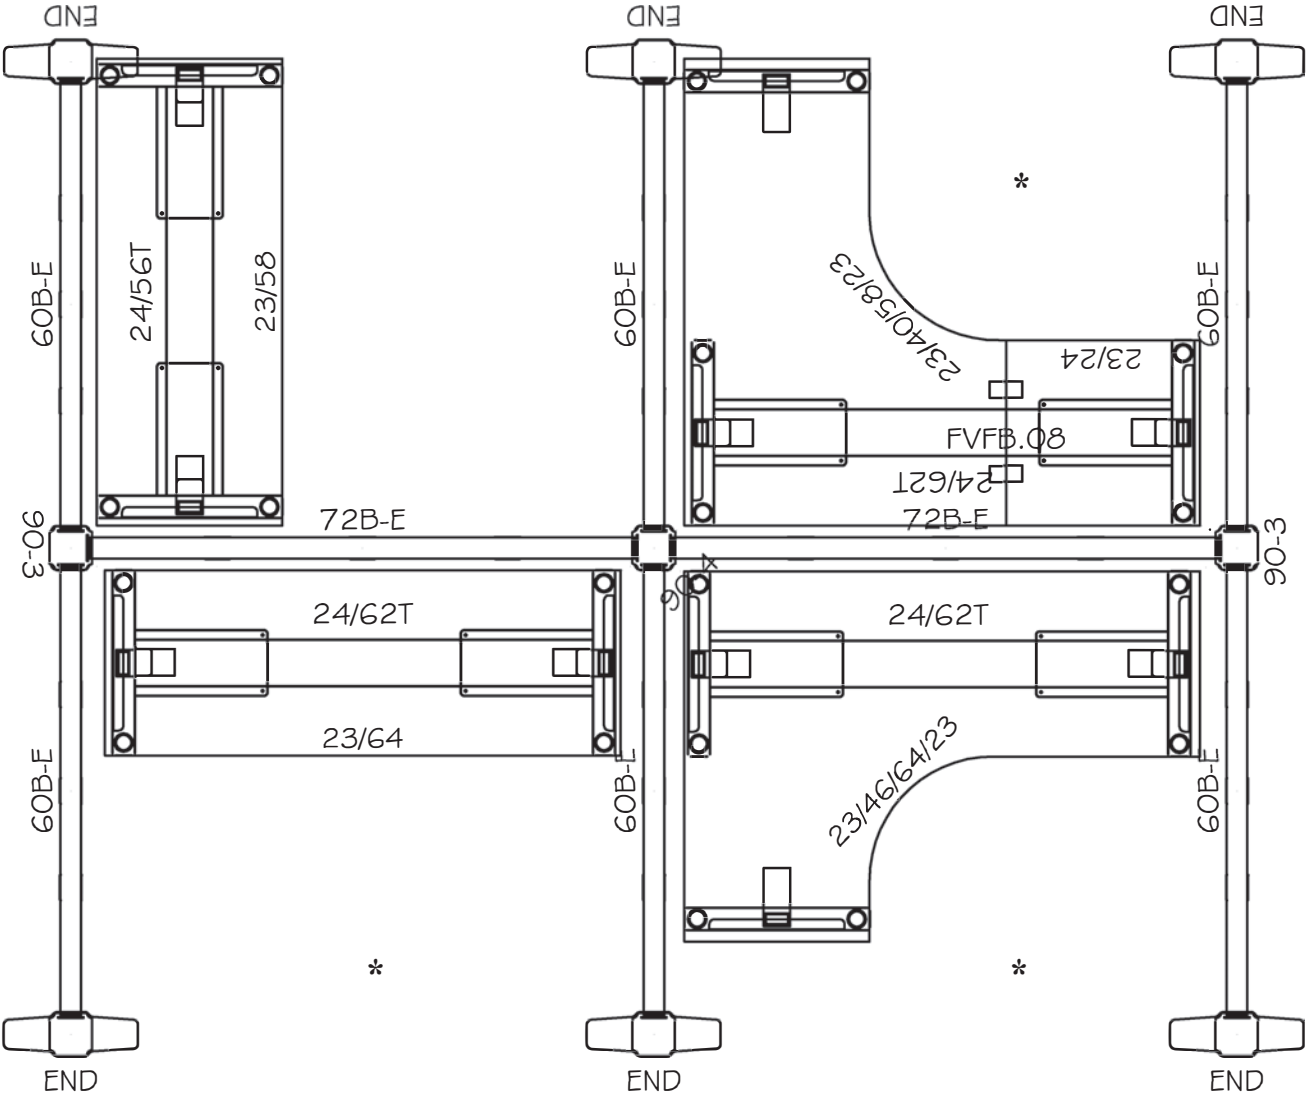


* When worksurface is wrapped by Beam on 3 sides, width must be reduced one full size. For example: 70" worksurface becomes a 64"

How to Order Beam


1 Select a Beam Package

- Beam package with screen support
or
- Beam package without screen support

Choose	Specify Part #	Description	Specify Finish
	FB-BEAM-36A-E	Beam package with screen support	Silver


2 Specify End of Run Posts

- End of Run post for each end of run (Quantity (2) total each run)

Choose	Specify Part # (Quantity 2)	Description
	FB-POSTEND	End of run post

3 Specify Support Posts


- Inline post for each package to package location (Quantity depends on length of run)
- 3 or 4 way post if applicable

Choose	Specify Part # (Quantity TBD)	Description
	FB-POST180-X-D	Support post used in middle of run


4 Specify Electrical

Options include:

- Select either base feed or power pole (power pole at End of Run only - base feed at any post)
- Specify duplexes - Circuit 1-4 (2) duplexes per side - **except 36"** which is (1) duplex per side
- Add data port
(FBDPP - less than 20 CAT 6 cables)
(FHDPP - more than 20 CAT 6 cables)

Choose	Specify Part #
	FB-BPE


Choose	Specify Part #
Duplex	FIRECP4.I

Choose	Specify Part #
	FBDPP

5 Specify Beam Mounted Screen (if applicable)

Options include:

- Clear glass
- Frosted glass

Choose	Specify Part #	Material
	FB-GLS2436-FR	FROSTED GLASS


6 Specify My-Hite Base

Choose	Specify Part #
	FSQAHBT-24-3

7 Specify My-Hite Top for Beam Application

Options include:

- Tops range from 40" to 76"


Choose	Specify Part #	Specify Finish
	FBRWS.XXXX	M28 Arctic

Beam Creep


Beam width is measured from center of Post to center of Post. Because of this, creep will be consistent, no matter the size of the beam packages, or the quantity of posts in the run.

Beam creep will be an additional 5" overall per run.

Examples below are Q1FB-BEAM-48B-E Beam Packages, 48"W


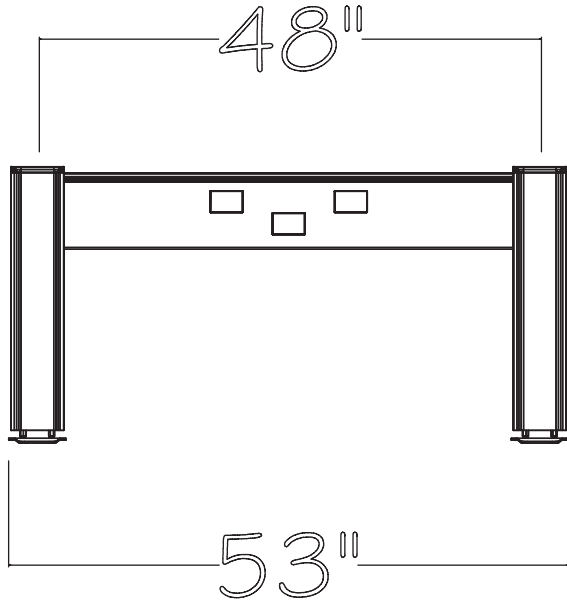


Single Station

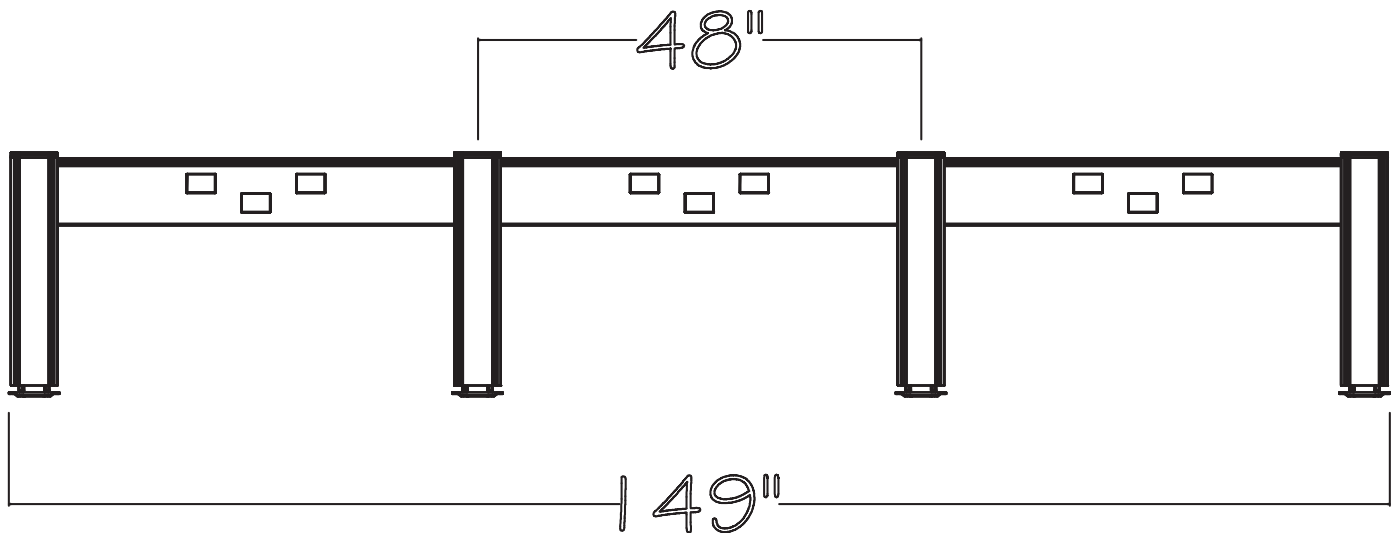



Three Station

Beam Elevation Height

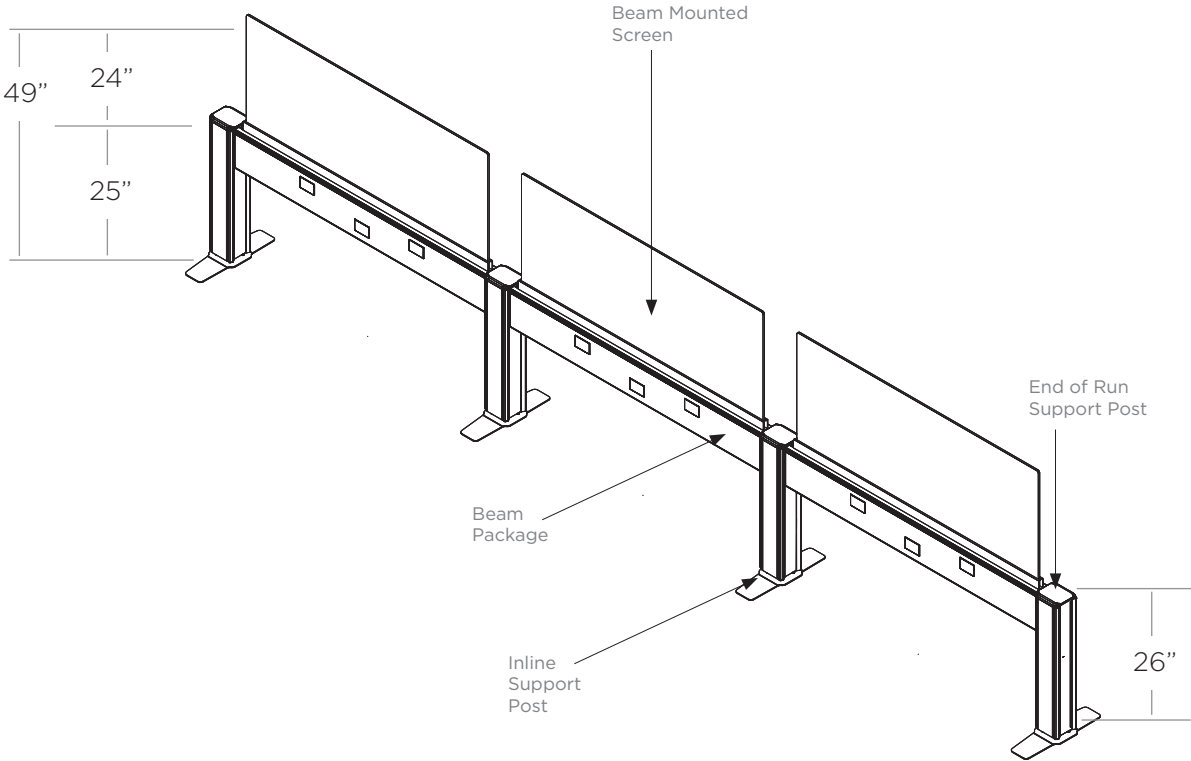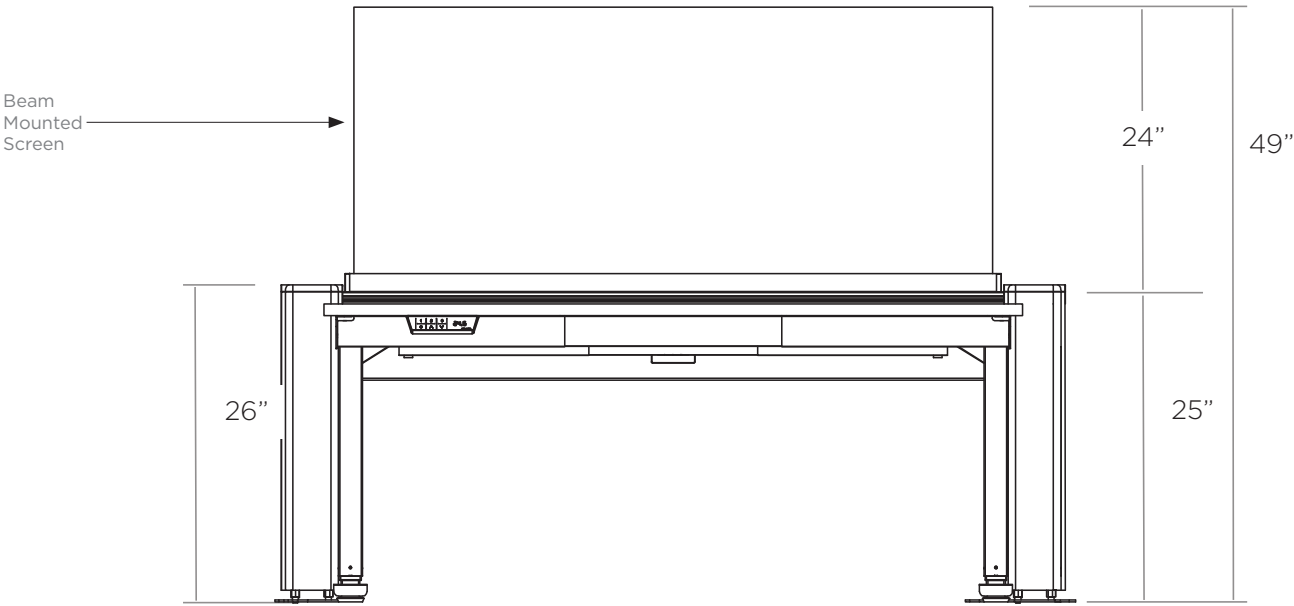

Beam Electrical Distribution

Data Port Plate

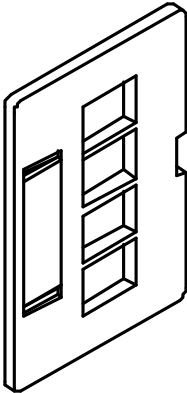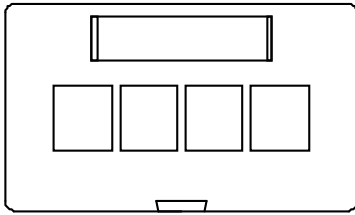**Product Description****PART #: FBDPP, FHDPP**

This Data Port Faceplate is field configurable, flush-mounted onto the Panel Base Kickplate, and provides 1 to 4 flush-mount ports for a variety of snap-in connectors and adaptors.

Product Notes

- Installation and changes can be made without removing the Panel Base Kickplate
- Plates can be installed and removed without any tools
- Window ID provided with each Data Port Plate
- Release latch provides easy access to connections without any tools
- Blank inserts included with each Data Port Plate

Dimensions**PART #: FBDPP,**

HEIGHT: 2¹/₈"

WIDTH: 3⁵/₈"

DEPTH: 0.25" (from face of Panel Base Kickplate)

MATERIAL: High impact plastic

PART #: FHDPP,

HEIGHT: 2¹/₈"


WIDTH: 3⁵/₈"

DEPTH: 0.75" (from face of Panel Base Kickplate)

MATERIAL: High impact plastic

Straight T-Leg Base

3 stage

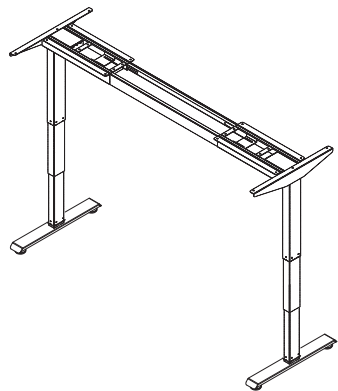

T Leg Base

DESCRIPTION

Electric height 3 stage adjustable base range 24.5"-50"

SPECIFICATION OPTIONS

product #: see charts below
base finish: page 6

ORDER EXAMPLE

product #: Q1FSQAHBT-24-3
base finish: SV Silver

Options/Notes


- Order worksurface separately
- Base adjusts 38" to 68" wide
- Maximum recommended top: 84"
- Minimum recommended top: 40"
- Weight load 220 lbs
- Includes (2) T-Leg bases
- Fixed trough cover is 2.5" and 8 " wide (all bases)
- Please note maximum overhang of 12"

STRAIGHT BASE

PART #	HEIGHT	WIDTH	DEPTH	PRICE	RECOMMENDED APPLICATION
Q1FSQAHBT-24-3	24.5" - 50"	38"-68"	24"	\$1,652	<ul style="list-style-type: none">• Order 24" base for use with 30" deep worksurfaces• Order 30" base for use with 36" deep worksurfaces• Minimum worksurface width: 40"• Maximum recommended worksurface width: 84"
Q1FSQAHBT-30-3	24.5" - 50"	38"-68"	30"	\$1,652	

Straight T-Leg Base

2 stage

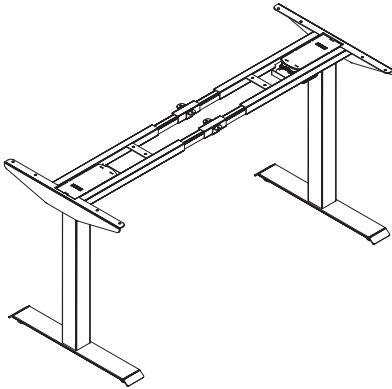

DESCRIPTION

Electric 2-stage height adjustable base range 27" - 45.5"

NOTES

- Order worksurface separately
- Base adjusts 41" to 74" wide
- Maximum recommended top: 84"
- Minimum recommended top: 42"
- Weight load - 260 lbs
- Maximum recommended overhang of 12"

SPECIFICATION OPTIONS

product #: see below
base finish: page 6

ORDER EXAMPLE


product #: FSQAHBT-24-2
base finish: SV Silver

STRAIGHT BASE

PART #	HEIGHT	WIDTH	DEPTH	PRICE	RECOMMENDED APPLICATION
Q1FSQAHBT-24-2	27" - 45.5"	41"-74"	24"	\$1,479	<ul style="list-style-type: none"> • Supports 24" to 30" deep tops • For use with rectangular worksurfaces, certain sizes of 120° corners or 90° corners • See recommended top application on pg 28

Rectangular

MY-HITE WORKSURFACES

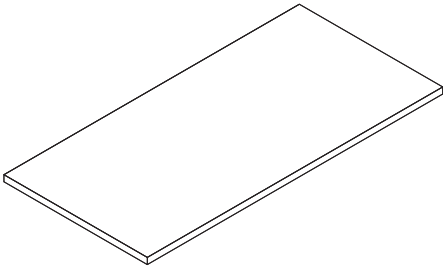


DESCRIPTION	
Worksurface top only, for use with height adjustable base within workstation application	
SPECIFICATION OPTIONS	ORDER EXAMPLE
product #: see charts below	product #:Q1FBRWS.2346
worksurface finish: see page 6	worksurface finish: Light Maple, M1
edge finish: see page 6	edge finish: Light Maple, E1

Options/Notes


- Grommet not available on Essentials worksurfaces. Specify worksurface with standard lead time for Grommets
- Top size reduced 1" in depth and 2" in width to fit within system workstation and prevent pinch points. We do not recommend using full size worktop in beam applications.

RECTANGULAR
WORKSURFACE, 23" DEEP




PART #	HEIGHT	DEPTH	WIDTH	PRICE	NOTES
Q1FBRWS.2346	1 1/8"	23"	46"	\$404	• Sizes are actual for example Q1FBRWS.2346 is 23" x 46"
Q1FBRWS.2358	1 1/8"	23"	58"	\$489	
Q1FBRWS.2370	1 1/8"	23"	70"	\$578	

RECTANGULAR
WORKSURFACE, 29" DEEP



PART #	HEIGHT	DEPTH	WIDTH	PRICE	NOTES
Q1FBRWS.2946	1 1/8"	29"	46"	\$477	• Sizes are actual for example FBRWS.2970 is 29" x 70"
Q1FBRWS.2958	1 1/8"	29"	58"	\$578	
Q1FBRWS.2970	1 1/8"	29"	70"	\$684	

Beam Package With power & data cutouts



DESCRIPTION

Beam package distributes power and data

SPECIFICATION OPTIONS

product #: see charts below
finish: SV, CW

ORDER EXAMPLE


product #: Q1FB-BEAM-36A-E
finish: Silver SV

Includes: Beam Top Cap & Base Covers with power
& data cutouts

Options/Notes


- Order data port plates separately
- All widths provide locations for duplexes; (2) on each side, (4) total per beam
- (1) Festoon included in package
- Order support posts separately
- Order infeed separately
- Order duplexes separately
- Order Data Port Plate separately

BEAM PACKAGE WITH SCREEN SUPPORT

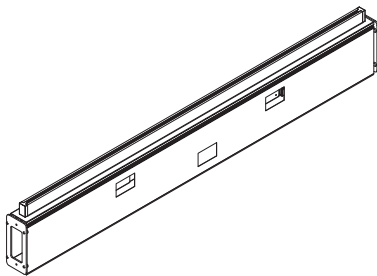


PART #	WIDTH	DEPTH	LIST	NOTES
Q1FB-BEAM-48A-E	48"	-	\$858	<ul style="list-style-type: none"> • Powered data base covers included • Non-powered base covers available separately, page 24 • Order screens separately
Q1FB-BEAM-60A-E	60"	-	\$1,046	
Q1FB-BEAM-72A-E	72"	-	\$1,257	

BEAM PACKAGE WITHOUT SCREEN SUPPORT

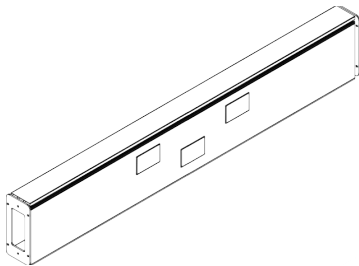

PART #	WIDTH	DEPTH	LIST	NOTES
Q1FB-BEAM-48B-E	48"	-	\$783	<ul style="list-style-type: none"> • Powered data base covers included • Non-powered base covers available separately, page 24
Q1FB-BEAM-60B-E	60"	-	\$948	
Q1FB-BEAM-72B-E	72"	-	\$1,142	

Supporting Post Inline & End of Run

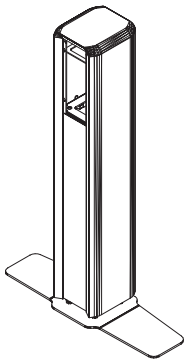


DESCRIPTION	
Posts support beam packages	
SPECIFICATION OPTIONS	ORDER EXAMPLE
product #: see charts below finish: Silver, Cloud White	product #: Q1FB-POST180 finish: SV Silver

Options/Notes


- Posts support beam packages

INLINE POST 180°




PART #	HEIGHT	WIDTH	DEPTH	WT. (LBS)	PRICE	NOTES
Q1FB-POST180					\$829	• Use inline, between (2) beam packages

END OF RUN POST



PART #	HEIGHT	WIDTH	DEPTH	WT. (LBS)	PRICE	NOTES
Q1FB-POSTEND					\$774	• Use at end of run

Supporting Post 2, 3, 4 Way



DESCRIPTION

Posts support beam packages

SPECIFICATION OPTIONS

product #: see charts below
finish: Silver, Cloud White


ORDER EXAMPLE

product #: Q1FB-POST90-3
finish: SV Silver

Options/Notes


- NA

2-WAY POST 90°




PART #	HEIGHT	WIDTH	DEPTH	PRICE	NOTES
Q1FB-POST90-2-D				\$797	• Use at 2-way, 90°

3-WAY POST 90°




PART #	HEIGHT	WIDTH	DEPTH	PRICE	NOTES
Q1FB-POST90-3				\$903	• Use at 3-way, 90°

4-WAY POST 90°



PART #	HEIGHT	WIDTH	DEPTH	PRICE	NOTES
Q1FB-POST90-4				\$903	• Use at 4-way, 90°

Beam Base Cover, non-powered

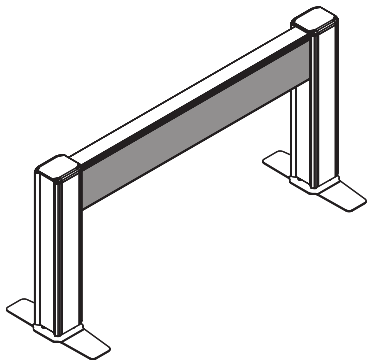

DESCRIPTION

Base cover without power/data knockout

SPECIFICATION OPTIONS


product #: see charts below
finish: SV, CW

ORDER EXAMPLE

product #: Q1FATB-BC-N-48
finish: Silver SV

Options/Notes

- Beam package includes power/data base covers



PART #

LIST

NOTES

Q1FATB-BC-N-48

\$75

Q1FATB-BC-N-60


\$91

Q1FATB-BC-N-72

\$108

- Non-powered base cover
- Order (1) for each side if needed

Beam Mounted Glass Screen

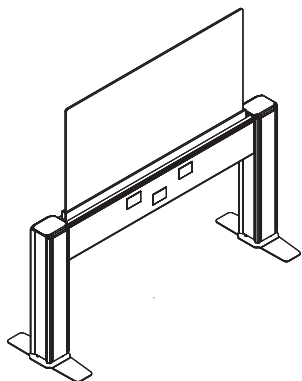

DESCRIPTION

Privacy screens for use with beam product

SPECIFICATION OPTIONS

product #: see charts below


ORDER EXAMPLE

product #: Q1FB-GLS2448-CL

Options/Notes


- For use with beam packages with screen support: i.e. Q1FB-BEAM-42A-E
- Includes mounting hardware
- Actual screen is 7" shorter than Beam Package

CLEAR GLASS SCREEN



PART #	WIDTH	HEIGHT	LIST	NOTES
Q1FB-GLS2448-CL	41"	24"	\$262	• Price is for (1) screen
Q1FB-GLS2460-CL	53"	24"	\$318	
Q1FB-GLS2472-CL	65"	24"	\$371	

FROSTED GLASS SCREEN



PART #	WIDTH	HEIGHT	LIST	NOTES
Q1FB-GLS2448-FR	41"	24"	\$440	• Price is for (1) screen
Q1FB-GLS2460-FR	53"	24"	\$541	
Q1FB-GLS2472-FR	65"	24"	\$643	


Beam Electrical Distribution

BASE POWER ENTRY



PART #	WIDTH	PRICE	NOTES
Q1FB-BPE	6'	\$466	<ul style="list-style-type: none">Base power entry, 4 circuit, for use with Beam product.

CEILING POWER ENTRY

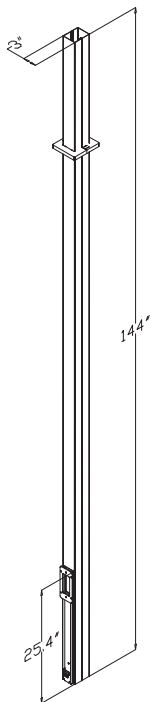

PART #	PRICE	NOTES
Q1FB-CPE	\$1,128	<ul style="list-style-type: none">Ceiling power entry, 4 circuit, for use with Beam product.CW, SV

ELECTRICAL DISTRIBUTION

Beam Electrical Distribution, continued

DESCRIPTION

Electrical distribution components

SPECIFICATION OPTIONS

product #: see charts below
finish: see page 6

ORDER EXAMPLE

product #: Q1FIRECP4.1
finish: CW


Options/Notes

- Circuit 4 is dedicated
- Power is 8 wire, (4) 20 AMP circuit
- Receptacles are rated 120V, 15 AMPS

RECEPTACLE 4-CIRCUITS

PART #	HEIGHT	WT. (LBS)	PRICE	NOTES
Q1FIRECP4.I	circuit I	0.25"	\$39	<ul style="list-style-type: none"> • Provides access to I, II, III, IIII circuit • Provides dedicated circuit with "IIII" receptacle • CW, SV • Receptacle -CONT are permanently marked CONTROLLED on the face of the receptacle and must be connected to a timer or motion sensor at the infeed location by a licensed electrician in order to comply with California T24
Q1FIRECP4.II	circuit II	0.25"	\$39	
Q1FIRECP4.III	circuit III	0.25"	\$39	
Q1FIRECP4.IIII	circuit IIII (dedicated)	0.25"	\$39	
Q1FIRECP4.II-CONT	Circuit II	0.25"	\$39	
Q1FIRECP4.III-CONT	Circuit III	0.25"	\$39	

DATA PORT PLATE



PART #	HEIGHT	WIDTH	DEPTH	WT. (LBS)	PRICE	NOTES
Q1FHDPP	2.125"	3.625"	0.750"	0.10	\$63	<ul style="list-style-type: none"> • If running more than (20) data cables, use Q1FHDPP. • If running less than (20) data cables, use Q1FBDPP. • CW or BU
Q1FBDPP	2.125"	3.625"	0.250"	0.10	\$63	

Power Distribution

DESCRIPTION	
Single circuit power distribution for tables	
SPECIFICATION OPTIONS	ORDER EXAMPLE
product #: see charts below	product #: Q1FD-BPI.1CIR

SINGLE CIRCUIT INFEED



	PART #	PRICE	NOTES
	Q1FD-BPI.1CIR	\$117	<ul style="list-style-type: none">Plug-in power infeed for use with table power distribution8' cord


TABLE POWER DISTRIBUTION

	PART #	PRICE	NOTES
	Q1FD-SFC-306-4A	\$102	<ul style="list-style-type: none">Use with single circuit infeed (Q1FD-BPI.1CIR)Power strip attaches to the underside of tabletops.


DAISY CHAIN POWER CONNECTOR

	PART #	PRICE	NOTES
	Q1FD-DCI.1CIR	\$117	<ul style="list-style-type: none">Connects adjacent table power distribution 8' cord

DESK MOUNTED POWER UNIT - CLAMP


	PART #	PRICE	NOTES
	Q1FPWR.DM	\$468	<ul style="list-style-type: none">Power unit clamps onto surfaceThe power cord comes attached to the unitThe cord measures approx. 6 ft in lengthIncludes 3 plugs and 2 USB-A portsDistributes up to 10 ampsfinish: available in BU and CW

DESK MOUNTED POWER UNIT - ADHESIVE

	PART #	PRICE	NOTES
	Q1FPWR.DM-2	\$468	<ul style="list-style-type: none">Power unit attaches to surface with adhesiveThe power cord comes attached to the unit. The cord measures approximately 6 ft in length.Includes 3 plugs, 1 USB-C and 1 USB-A portDistributes up to 10 ampsfinish: available in BU and CW


Accessories

WIRE MANAGER




PART #	HEIGHT	WIDTH	DEPTH	LIST	NOTES
Q1FMHWM	1 7/8"	32" - 59"	6"	\$107	<ul style="list-style-type: none"> Wire manager covers user's wiring (i.e.: computer, phone, etc.); adjustable width To use a wire manager on your My-Hite table with fabric covered privacy screen you must order "with gap". Wire manager telescopes from 32"- 59" Includes T-Support post with height of 3 1/4". Specify finish: CW or SV

MESH WIRE MANAGER



PART #	LENGTH	PRICE	NOTES
Q1FFWM.18	18"	\$164	<ul style="list-style-type: none"> Wire manager mounts to the bottom of a worksurface to manage cords
Q1FFWM.34	34"	\$164	<ul style="list-style-type: none"> Finish: Black with red zipper

CASTERS



PART #		LIST	NOTES
Q1FMHCS-3.4	Castors for 3-Stage Straight Bases (4 locking casters included)	\$197	<ul style="list-style-type: none"> There are 4 locking casters and are installed in the field.
Q1FMHCS-2.4	Castors for 2-Stage Straight Bases (4 locking casters included)	\$197	<ul style="list-style-type: none"> Height of table is increased by 2" and will not be reflected on the display height Castors are dark grey

SINGLE MONITOR ARM




PART #	HEIGHT	WIDTH	DEPTH	LIST	NOTES
Q1FMA-S	—	—	—	\$709	<p>CW, SV, BU Finish</p> <p>Includes attachment hardware for clamp, grommet and Verity track mount.</p> <p>Includes (2) USB ports, 6' cords</p>

DUAL MONITOR ARM



PART #	HEIGHT	WIDTH	DEPTH	LIST	NOTES
Q1FMA-D	—	—	—	\$1,012	<p>CW, SV, BU Finish</p> <p>Includes attachment hardware for clamp, grommet and Verity track mount.</p> <p>Includes (2) USB ports, 6' cords</p>

SHIELD Freestanding Laminate Panel Feet

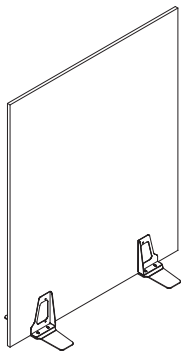

DESCRIPTION

Freestanding laminate panel with feet

SPECIFICATION OPTIONS

product #: see charts below
surface finish: see page 6

ORDER EXAMPLE

product #: Q1FZFS.3045
surface finish: M10 Espresso

Options/Notes


- Dimensions are actual
- Laminate is 3/4" thick
- Painted metal feet in Cloud White

45" HIGH	PART #	HEIGHT	WIDTH	LIST
	Q1FZFS.3045	45"	30"	\$1,251
	Q1FZFS.3645	45"	36"	\$1,335
	Q1FZFS.4245	45"	42"	\$1,420
	Q1FZFS.4845	45"	48"	\$1,502

53" HIGH	PART #	HEIGHT	WIDTH	LIST
	Q1FZFS.3053	53"	30"	\$1,327
	Q1FZFS.3653	53"	36"	\$1,425
	Q1FZFS.4253	53"	42"	\$1,523
	Q1FZFS.4853	53"	48"	\$1,622

60" HIGH	PART #	HEIGHT	WIDTH	LIST
	Q1FZFS.3060	60"	30"	\$1,393
	Q1FZFS.3660	60"	36"	\$1,559
	Q1FZFS.4260	60"	42"	\$1,670
	Q1FZFS.4860	60"	48"	\$1,780

SHIELD Freestanding Laminate Panel Casters

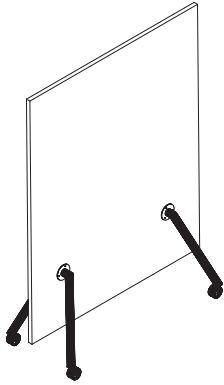

DESCRIPTION

Freestanding laminate panel with casters

SPECIFICATION OPTIONS

product #: see charts below
surface finish: see page 6

ORDER EXAMPLE

product #: Q1FZFSMOB.4245
surface finish: M10 Espresso

Options/Notes

- Dimensions are actual
- Laminate is 3/4" thick
- Legs are cloud white, casters are white
- Includes 4 locking casters

45" HIGH

PART #	HEIGHT	WIDTH	LIST
Q1FZFSMOB.4245	45"	42"	\$1,607
Q1FZFSMOB.4845	45"	48"	\$1,692

53" HIGH

PART #	HEIGHT	WIDTH	LIST
Q1FZFSMOB.4253	53"	42"	\$1,712
Q1FZFSMOB.4853	53"	48"	\$1,809

60" HIGH

PART #	HEIGHT	WIDTH	LIST
Q1FZFSMOB.4260	60"	42"	\$1,805
Q1FZFSMOB.4860	60"	48"	\$1,915