

# LUNE TRAINING TABLE

## TELESCOPIC SUPPORT BAR

Model Number : FCTTB or FCTTB-MOD

**IMPORTANT NOTES:**


- 2 Person installation
- Please Read Instructions Before Use
- Place all components on a clean and smooth surface during installation
- Loosely secure screws and bolts until the table is completely assembled, then tighten

## Parts List


PART#	NAME	QUANTITY
A	Allen Wrench	1
B	Set Screw	8
C	Wood Screw Ø4.2*20	7
G	Worksurface Bolt M6*20	8
H	Bar Support	2
I	Adjustable Leaver Cap	1
J	Locking Caster	4
O	Cable Clips	2
P	Telescopic Support Bar	1
Q	Telescopic Connector	2
L	Worktop	1
M	Modesty	1
N	Base Kit	1

## Installation Steps

Step 1: Attach casters J to base kit N

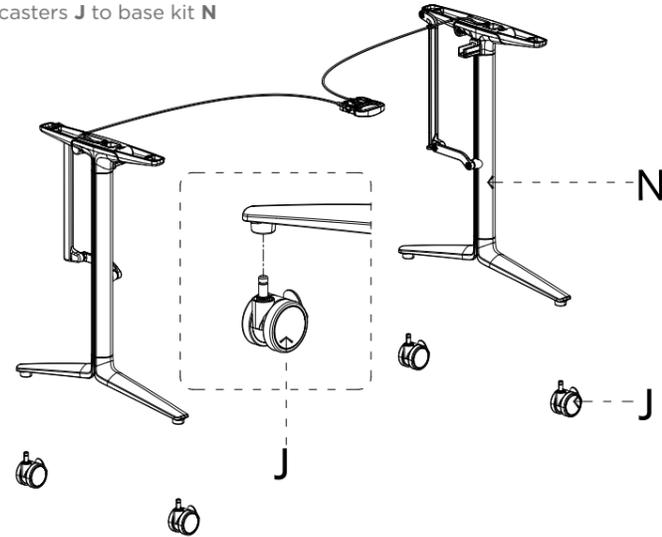


Step 2: Attach telescopic support bar P to base kit N using (2) bar supports H and (2) telescopic connectors Q.

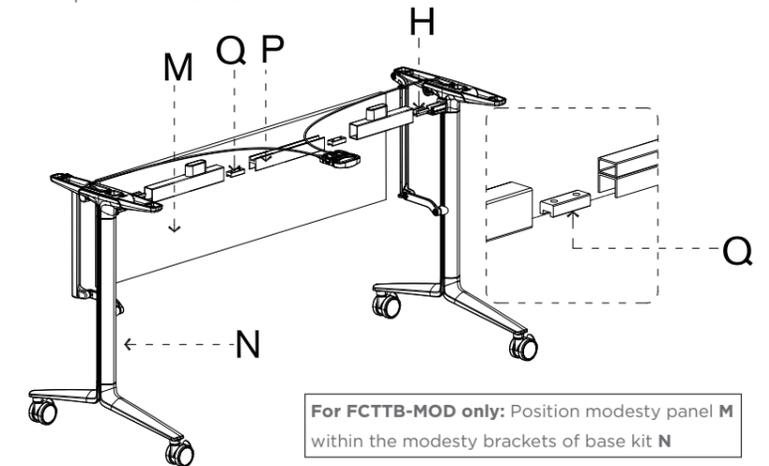


**For FCTTB-MOD only:** Position modesty panel M within the modesty brackets of base kit N

Step 3: Secure the telescopic support bar P to the base kit N using (8) set screws B.  
Tighten set screws.

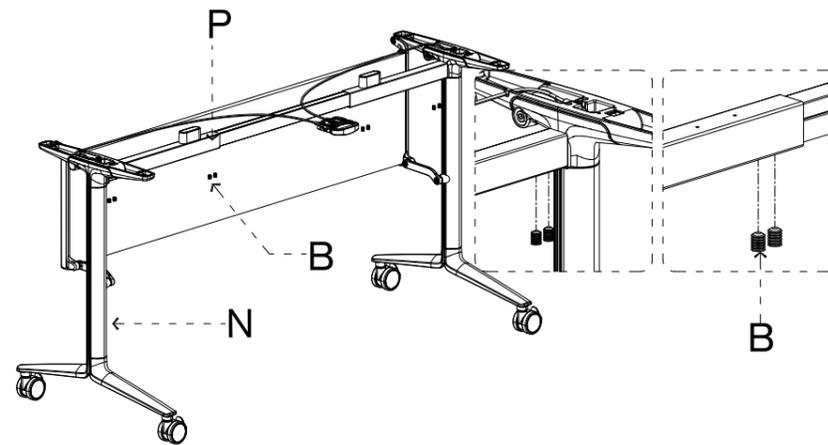


**For FCTTB-MOD only**

Step 4: Secure modesty panel M to base kit N using (4) wood screws C

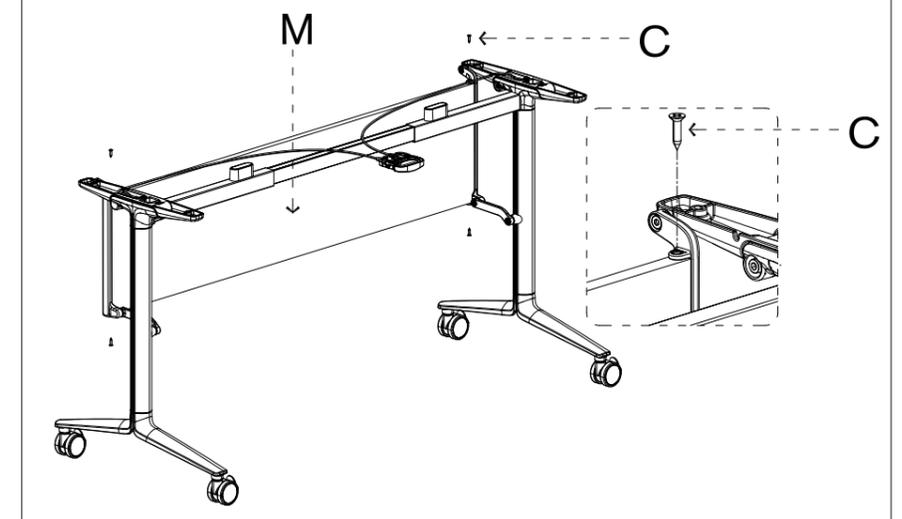


Step 5: Flip the base onto the backside of the worktop L as shown in image

Step 6: Secure the base kit N to the work top L with (4) worktop bolts G

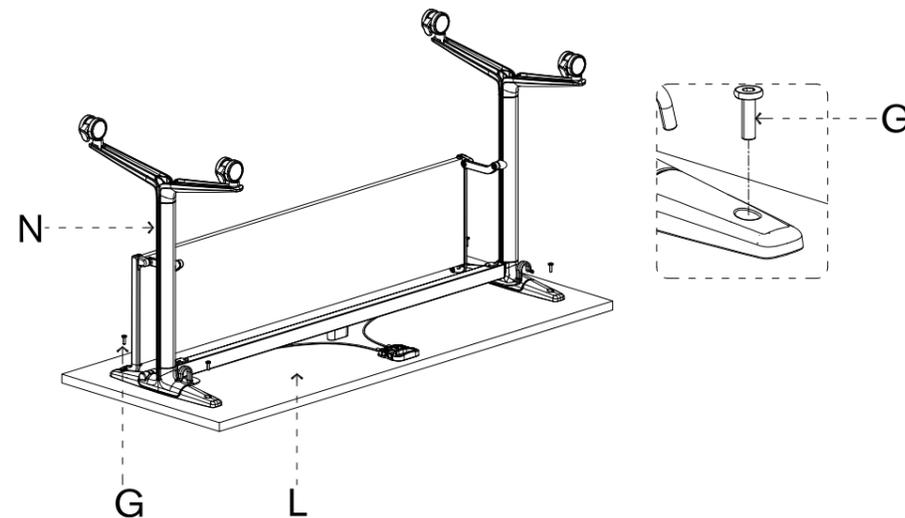


Step 7: Secure the lever to the work top L with (3) wood screws C

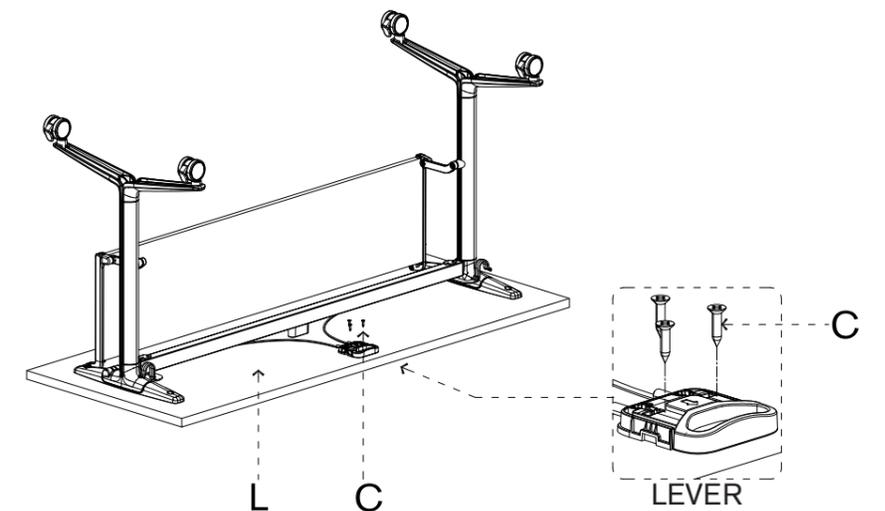


**Step 8:** Fold the base kit N by pulling on the lever.

**Step 9:** Secure the base kit N to the work top L with (4) work top bolts G

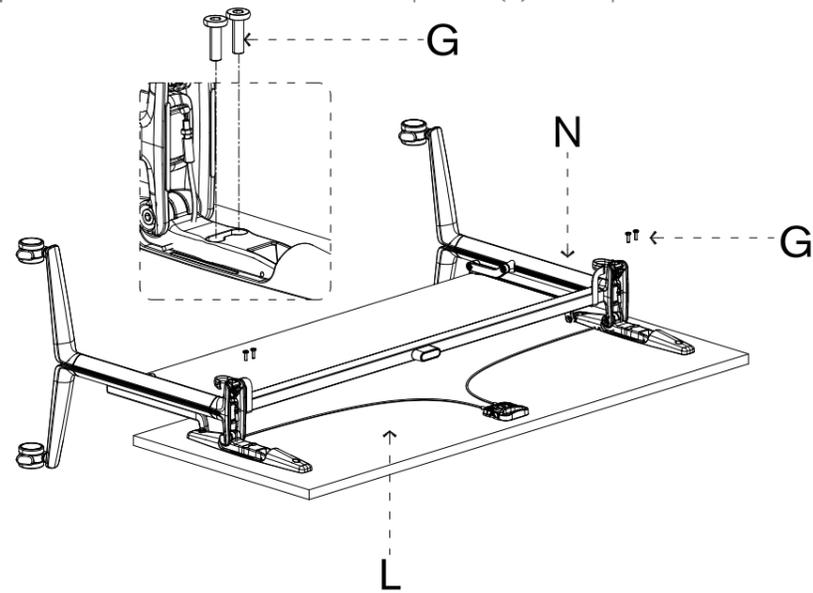


**Step 11:** Secure cords with cord clip O, and cap off leaver with leaver cap I

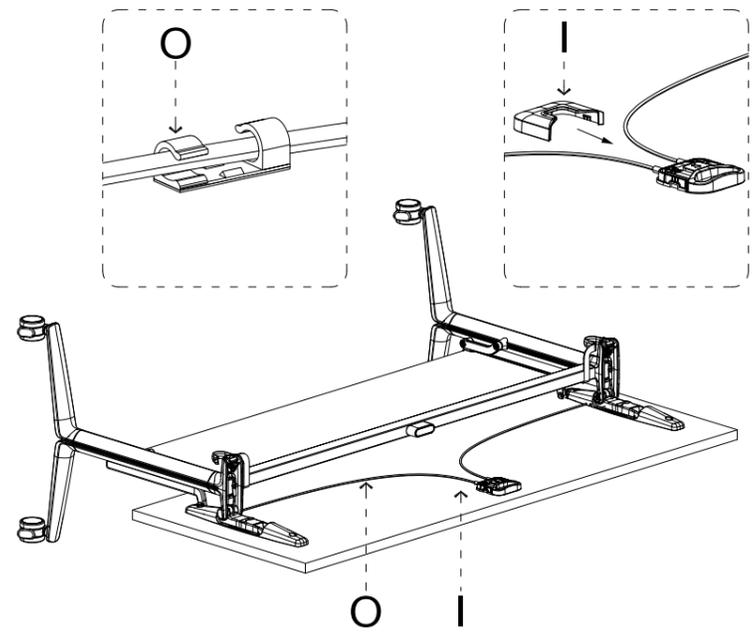

**Step 12:** Turn table right side up

**Step 13:** Check all 4 casters lock properly

**Step 14:** Check the flip top mechanism works properly

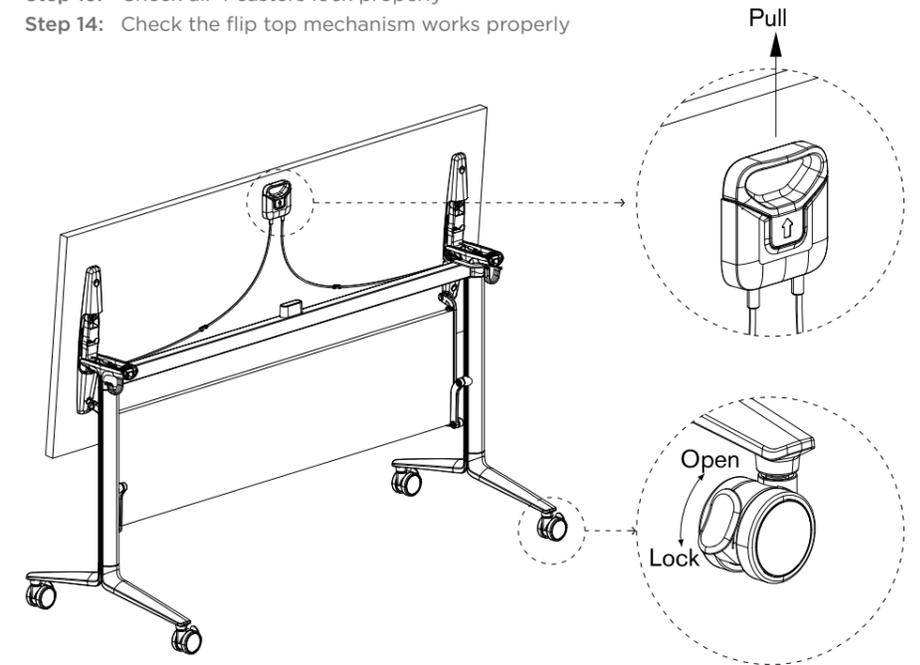

**Completed Installation:**

